


NS-30

PRESSURE TYPE


Dimensions

[Unit: mm(inch)]

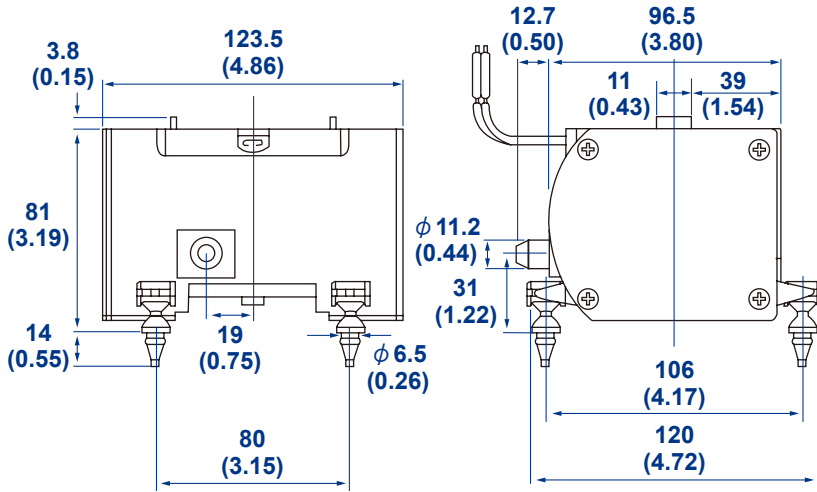


Performance Curves

— 120V/60Hz — 230V/50Hz

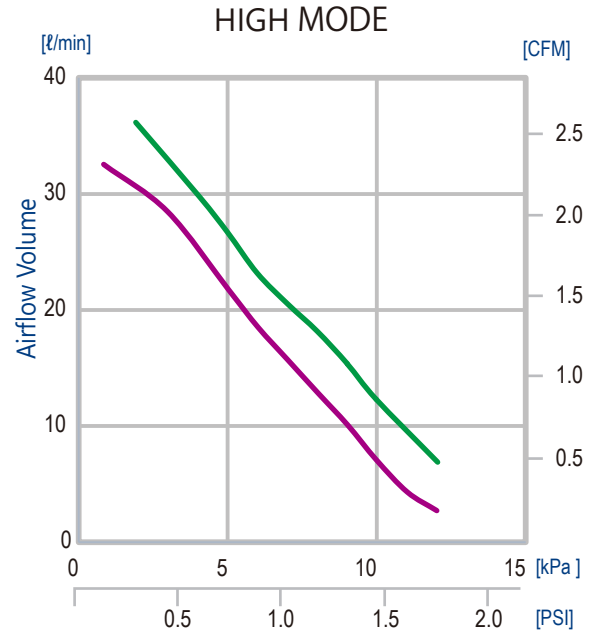

Specifications

| | | | | | |
|------------------------|-------|------|-----|------|-----|
| Rated Voltage | V | 115V | | 230V | |
| Power Supply Frequency | Hz | 60 | | 50 | |
| Rated Loading Pressure | kPa | OPEN | | 5kPa | |
| | | HIGH | LOW | HIGH | LOW |
| Airflow Volume | l/min | 40 | 18 | 19 | 6 |
| Power Consumption | W | 15 | 7 | 14 | 7 |
| Noise Level | dBA | 50 | 35 | 50 | 40 |
| Weight | kg | 1.2 | | | |

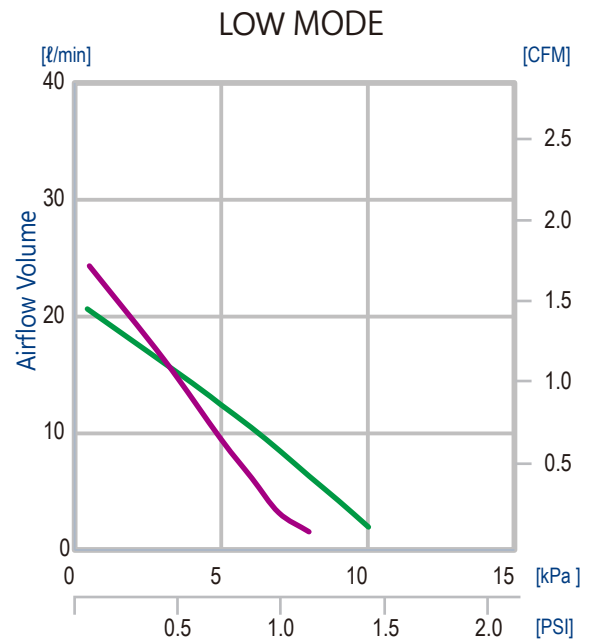

- Performance data is representative of typical values. Specifications and performance data are subject to change without notice. Purchaser is responsible for determining suitability for product applications
- "HIBLOW" is a registered mark of Techno Takatsuki co., Ltd.