


# VP-4020, 5030, 6035

PRESSURE TYPE

## Flexible Port Locations



## Dimensions

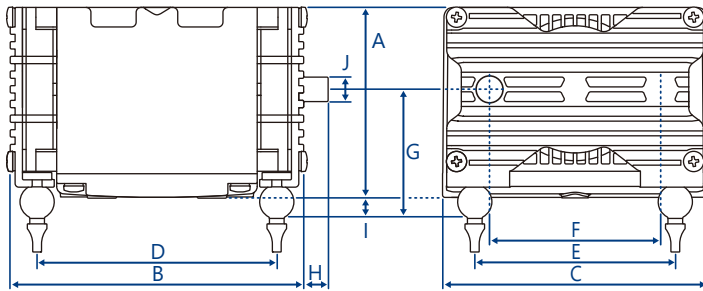

	A	B	C	D	E	F	G	H	I	J
mm	78	120	108.3	98	82	70	52	10	7.8	∅10
inch	3.07	4.72	4.26	3.86	3.23	2.76	2.05	0.39	0.3	0.39

\*The figure represents the standard configuration. Customization of nozzle position is available.

## Specifications

		VP-4020		VP-5030		VP-6035	
Rated voltage	V	AC120	AC230	AC120	AC230	AC120	AC230
Power frequency	Hz	60	50	60	50	60	50
Max Airflow volume	L/min	43	42	54	46	60	52
Max Power consumption	W	18	16	27	23	35	30
Sound level	dBA	43	41	44	41.5	45	42
Weight	kg	1.95					

\*All characteristics values are only for reference, and are not guaranteed values.

\*Sound data shown is with pump operating at 10 kPa and exhaust plumbed away from the unit.

- Performance data is representative of typical values. Specifications and performance data are subject to change without notice. Purchaser is responsible for determining suitability for product applications
- "HIBLOW" is a registered mark of Techno Takatsuki co., Ltd.

## Performance Curves

— 120V/60Hz — 230V/50Hz

