



VP-7045

PRESSURE TYPE

Flexible Port Locations

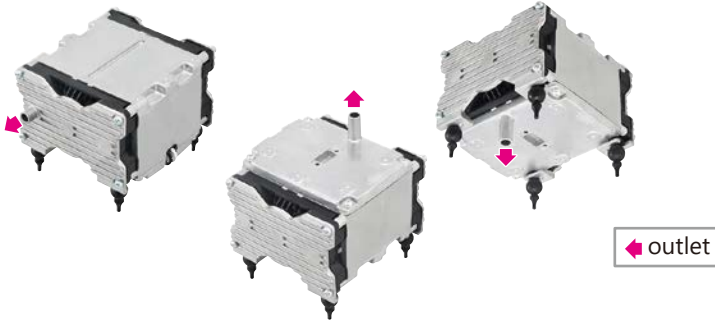

Dimensions

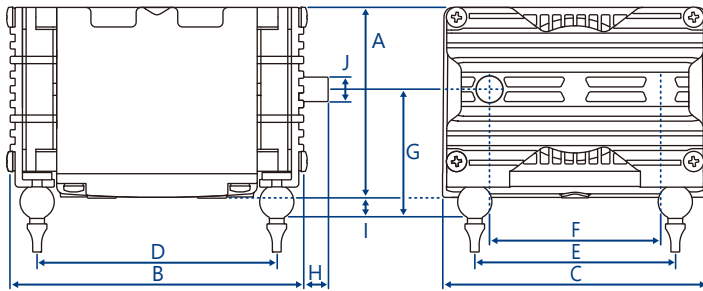

	A	B	C	D	E	F	G	H	I	J
mm	78	120	108.3	98	82	70	52	10	7.8	∅10
inch	3.07	4.72	4.26	3.86	3.23	2.76	2.05	0.39	0.3	0.39

*The figure represents the standard configuration. Customization of nozzle position is available.


Specifications

		VP-7045	
Rated voltage	V	AC120	AC230
Power frequency	Hz	60	50
Max Airflow volume	L/min	62	55
Max Power consumption	W	41	32
Sound level	dBA	46	44
Weight	kg	1.95	


*All characteristics values are only for reference, and are not guaranteed values.
*Sound data shown is with pump operating at 10 kPa and exhaust plumbed away from the unit.

Performance Curves

Pressure range for continuous use

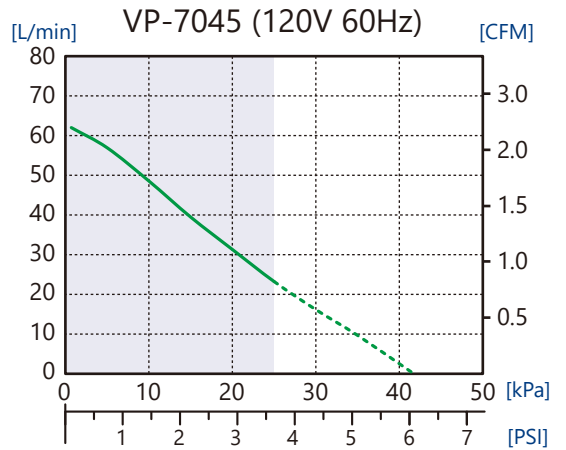

*Pressure range for continuous use : 0~25kPa

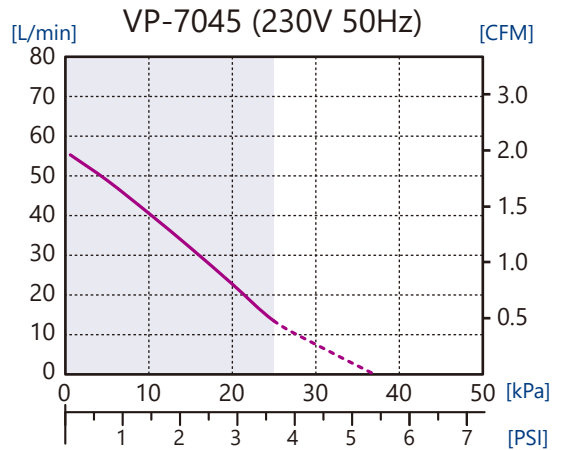

*Pressure range for continuous use : 0~25kPa

- Performance data is representative of typical values. Specifications and performance data are subject to change without notice. Purchaser is responsible for determining suitability for product applications
- "HIBLOW" is a registered mark of Techno Takatsuki co., Ltd.