


POWERING SYSTEMS AROUND THE WORLD

HIBLOW[®] USA

Medical and Laboratory

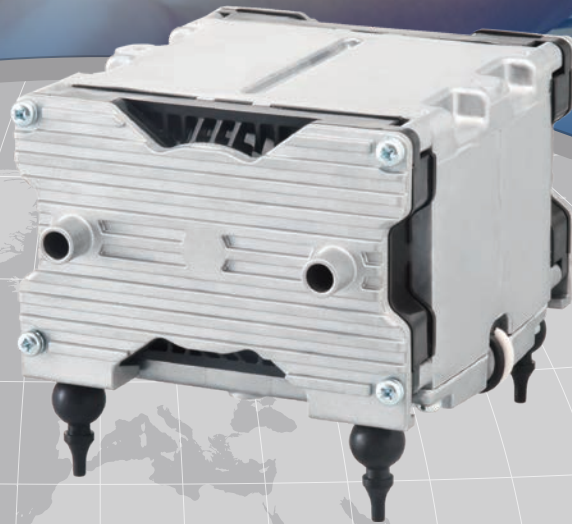

www.HIBLOW-USA.com • 734-944-5032
Quiet • Robust • Longest Lasting • Best Quality

With over 30 years of experience in the industry we understand that precision engineering and manufacturing, safety, and reliability are paramount for linear air pumps used in medical products and laboratory OEM equipment.

What sets us apart from the rest?

Prestige

Inventor of the linear air pump, 12M pumps sold

Durability

Highest quality, longest service life in the industry

Availability

Fully stocked warehouse located in Saline, MI

Support

Knowledgeable and friendly staff with a sense of urgency

VP SERIES

Multiple port options,
1/8" NPT,
Custom voltages



Model	Max Flow (lpm / cfm)	Max Pressure* (kPa / psi)	Power Consumption (Watts)	Noise Level (dBA @ 1m)	Weight (kg / lbs)
VP-4020	42 / 1.4	26 / 3.7	18	43	1.95 / 4.2
VP-5030	54 / 1.9	32 / 4.6	27	44	1.95 / 4.2
VP-6035	60 / 2.1	38 / 5.5	35	45	1.95 / 4.2
VP-7045	62 / 2.1	25 / 3.6	41	46	1.95 / 4.2
VP-4020S	46 / 1.6	(23.4 / 3.3)	18	43	1.95 / 4.2
VP-5030S	57 / 2.0	(27.63 / 4.0)	27	44	1.95 / 4.2
VP-6035S	65 / 2.2	(31 / 4.4)	35	45	1.95 / 4.2
VP-7045S	70 / 2.4	(25 / 3.6)	43	45	1.95 / 4.2

V
A
C
U
U
M

*Max Continuing Operating Pressure

KP SERIES

Multiple port options,
1/8" NPT, Custom voltages,
Integrated enclosure for
protection and noise reduction



Model	Max Flow (lpm / cfm)	Max Pressure* (kPa / psi)	Power Consumption (Watts)	Noise Level (dBA @ 1m)	Weight (kg / lbs)
KP-4020	37 / 1.3	27 / 3.9	18	31	3.8 / 8.3
KP-5030	42 / 1.4	33 / 4.7	27	34	3.8 / 8.3
KP-6035	51 / 1.8	38 / 5.5	35	36	3.8 / 8.3
KP-4020S	43 / 1.5	(22.7 / 3.2)	18	31	3.8 / 8.3
KP-5030S	54 / 1.9	(26.9 / 3.9)	27	34	3.8 / 8.3
KP-6035S	61 / 2.1	(27.6 / 4.0)	35	36	3.8 / 8.3

VACUUM

Model	Max Flow (lpm / cfm)	Max Pressure* (kPa / psi)	Power Consumption (Watts)	Noise Level (dBA @ 1m)	Weight (kg / lbs)
-------	-------------------------	------------------------------	------------------------------	---------------------------	----------------------



C SERIES

C-5BN	10 / .3	10 / 1.4	8.5	34	0.7 / 1.5
CD-8	17 / .6	15 / 2.1	8.5	34	0.7 / 1.5



NS-30

NS-30	45 / 1.5	8 / 1.1	12	45	1.2 / 2.6
-------	----------	---------	----	----	-----------



HP SERIES

Model	Max Flow (lpm / cfm)	Max continuing Operating Pressure (kPa / psi)	Power Consumption (Watts)	Noise Level (dBA @ 1m)
HP-20	32 / 1.1	15 / 2.1	17	32
HP-40	80 / 2.1	20 / 2.9	38	32
HP-60	100 / 3.5	25 / 3.6	51	35
HP-80	120 / 4.2	25 / 3.6	71	36
HP-100	110 / 3.8	25 / 3.6	100	38
HP-100LL	130 / 4.5	30 / 4.3	75	42
HP-120	150 / 5.2	25 / 3.6	125	40
HP-120LL	150 / 5.2	30 / 4.3	100	42
HP-150	200 / 7.0	30 / 4.3	155	45
HP-200	200 / 8.4	30 / 4.3	250	46

Powering Systems Around the World

HIBLOW USA
1300 Tefft Court, Suite 8
Saline, Michigan 48176



734-944-5032
Fax 734-944-5163
info@HIBLOW-USA.com

HIBLOW USA was incorporated in 2002 serving as the North, Central, and South American sales and distribution subsidiary for Techno Takatsuki Co. (TTC), the inventor of linear air pump technology. TTC has been in business since 1947 with manufacturing in Japan, Vietnam, and the Philippines. Global sales offices are located in France, Spain, Korea, and China.